


SRM-TSC/TSD/TSY/TSZ

Sensor Terminal Block
传感器端子台

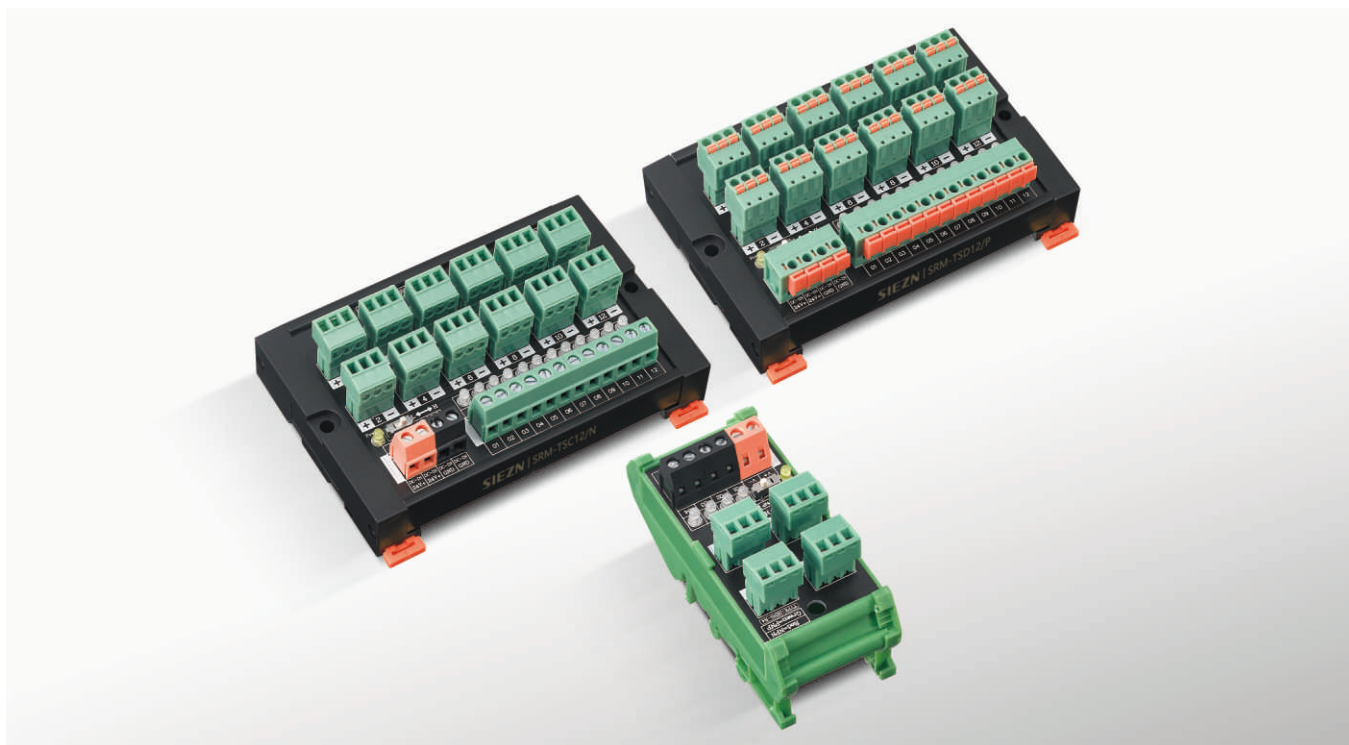

规格参数 SPECIFICATIONS

- 安装类型：导轨
- 接线方式：弹片式、螺钉式、MIL连接器
- 额定电流：0.5A
- 额定电压：24V
- 传感器输入类型：兼容NPN/PNP
- 输入端接口线径：28-16AWG/0.5-1.5mm²
- 输出端接口线径：22-12AWG/0.5-2.5mm²

- Installation type: rail
- Connection method: shrapnel type, screw type, MIL connector
- Rated current: 0.5A
- Rated voltage: 24V
- Sensor input type: compatible with NPN/PNP
- Input port interface wire diameter: 28-16AWG/0.5-1.5mm²
- Output port interface wire diameter: 22-12AWG/0.5-2.5mm²



外形尺寸 DIMENSIONS

路数 Number of Units	尺寸(长×宽×高) Dimensions (LxWxH)	型号(螺钉式) Model (screw type)	型号(弹片式) Model (shrapnel type)	型号(MIL连接器+螺钉式) Model (MIL connector + screw type)	型号(MIL连接器+弹片式) Model (MIL connector + shrapnel type)
4	38×90×57	TSC04/N	TSD04/N	TSY04/N	TSZ04/N
8	91×90×41	TSC08/N	TSD08/N	TSY08/N	TSZ08/N
12	117×90×41	TSC12/N	TSD12/N	TSY12/N	TSZ12/N
16	146×90×41	TSC16/N	TSD16/N	TSY16/N	TSZ16/N
4	38×90×57	TSC04/P	TSD04/P	TSY04/P	TSZ04/P
8	91×90×41	TSC08/P	TSD08/P	TSY08/P	TSZ08/P
12	117×90×41	TSC12/P	TSD12/P	TSY12/P	TSZ12/P
16	146×90×41	TSC16/P	TSD16/P	TSY16/P	TSZ16/P