

SRM-TPC16

Power Distribution Module
电源分配模块



产品特点 FEATURES

- 本端子台专为直流控制电路设计；把一路直流输入转为带开关控制及自恢复保险丝的8路输出；
- 端子台装有8路；自恢复保险可作过流及短路保护用，8路开关可分开控制每路的断开和闭合；
- 带有电源显示LED，以及自恢复保险过流及短路警示LED；
- 配电总电源引出端子，可级联下一个本端子台，使配电更整洁、方便。
- This terminal block is designed for direct current control circuit; transfer one direct current to with switch control and insure 8 output;
- This terminal block has 8 ways insurance and it can use for short current production, 8 ways switch and can control each OFF and ON;
- With LED, fuze and short circuit LED;
- There is a main power fetch out terminal, and can connect with the next terminal block. Make the wiring more tidy and convenient.

注意事项 Note

本端子台专为低压设计，请勿接入大于36V的电源。
The terminal station designed for low pressure, do not access power above 36V.

剥线长度: 6mm 1mm² Following /AWG16




适合压着端子 SUITABLE FOR TERMINALS

名称 Name	实物图 Physical diagram	尺寸图 Size diagram
叉型裸端子 Forked Bare Terminal		MAX6.2mm MIN3.2mm MAX5.8mm MIN4.2mm
圆形裸端子 Needle Bare Terminal		MAX6.2mm MAX3.2mm MAX4.2mm MIN5.8mm

规格参数 SPECIFICATIONS

• 输入 Input	输入电流 Input current	16A
	输入电压 Input voltage	DC24V
	每路输出电流 Each one has output current	2A
	输入侧对应 Corresponding input Devices	Into the line side AC power supply
• 输出侧对应 Corresponding output Devices		Load-side AC power supply

外形尺寸图 DIMENSIONS

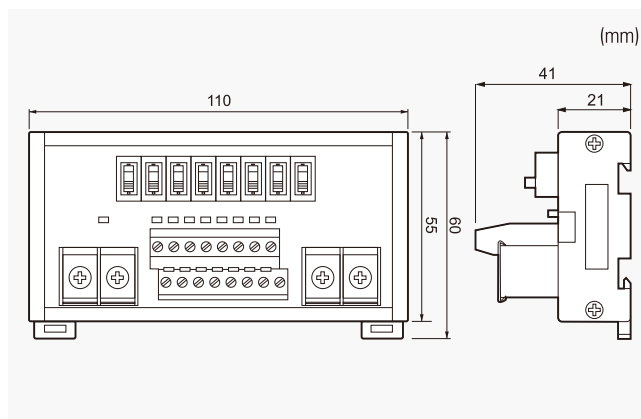

接线图 WIRING DIAGRAM

